

KOBE Impact Wrench

1/2

IW500

One piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 90psi air pressure, 300ft/lbs torque, 4cfm* air consumption, 16mm bolt capacity.



Sound pressure level: 88dBA.
Sound power level: N/A dBA.
Vibration level: 4.2m/s².
Overall length: 191mm.

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
7,000	2.30kg	KBE-270	£104.03	£72.82

Impact Wrench Kit

1/2

IWS500

Kit supplied complete in robust blow-moulded case.

Includes: 1/2" impact wrench IW500. 10 metric sockets: 9 - 27mm. Threaded tailpiece, in-line mini-oiler and oil bottle. One piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 90psi air pressure, 300ft/lbs torque, 4cfm* air consumption, 16mm bolt capacity.

Sound pressure level: 93dBA.

Sound power level: N/A dBA.

Vibration level: 1.219m/s².

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.

Overall length: 191mm.



*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
7,000	4.30kg	KBE-270	£119.48	£83.64

Impact Wrench



IW750

One-piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 25mm bolt capacity. 90psi air pressure, 7.5cfm* air consumption. 500ft/lbs torque.

3/4



Sound pressure level: 83dBA.

Sound power level: N/A dBA.

Vibration level: 0.449m/s².

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Overall length: 245mm.

Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
4,200	5.00kg	KBE-270	£235.87	£165.11

KOBE Impact Wrench

NEW



G7321

Suitable for light workshop and garage use. Twin hammer mechanism with a 4-point adjustable air (speed) forward/reverse speed regulator. Ergonomic and comfortable handle grip with vibration dampening a fixed inlet and exhaust. One finger stop/start trigger operation. Downward facing external exhaust in handle.

Free speed: 10,100rpm, forward: position 1 8,000rpm, position 2 9,100rpm, position 3 10,100rpm, reverse: 10,200rpm.

Maximum torque: 393Nm (290ft/lbs).

Working torque: 339Nm (250ft/lbs).

Recommended air pressure: 6.2bar (90psi).

Air consumption: 3.4cfm*

Air inlet thread: 1/4" NPT.

Minimum air hose size (ID): 10mm (3/8").

Overall length: 160mm.



*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
10,100		KBE-270	£182.31	£127.62

KOBE Impact Wrench



B7444

Suitable for production and assembly applications. Twin hammer mechanism. Three position dial style speed regulator. Forward/reverse selection. Ergonomic and comfortable handle grip. Fixed inlet and exhaust.

Forward: position 1: 4000rpm, position 2: 5000rpm, position 3: 7000rpm.

Reverse: position 1: 3000rpm, position 2: 5000rpm, position 3: 7000rpm.

Collet size: 1/2" (13mm).

Free speed: 7,000rpm.

Maximum torque: 813Nm (600ft/lbs).

Recommended air pressure: 6.2bar/90psi.

Air consumption: 4cfm* (113ltr/min).

Air inlet thread: 1/4" NPT.

Minimum air hose size (ID): 10mm (3/8").

Sound pressure level: 83dBA.

Sound power level: 90dBA. **Vibration level:** 6.8m/s².

Overall length: 183mm.



Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
7,000	1.94g	KBE-270	£224.54	£157.18

*Based on a 15 second cycle per minute average use.

KOBE Heavy Duty In-Line Air Impact Wrench

1

1" square drive. Suitable for industrial and commercial production and assembly applications. Side handle for two-handed operation. Top mounted spring balance loop. Easy to use forward/reverse switch and three position power regulator. Top venting exhaust. Oiling points for daily maintenance.

Free speed: 3,300rpm. **Final drive:** 1" (25mm) hex.

Working torque: 2,030Nm (1500lb/ft).

Maximum torque: 2,300Nm (1700lb/ft).

Safe working pressure: 6.2bar/90psi.

Air inlet thread: 1/2" NPT.

Minimum air hose size (ID): 1/2" (13mm).


Air pressure: 6.3bar/90psi.

Air consumption: 7.0cfm.

Sound pressure level: 87dBA.

Vibration level: 5.9m/s².

Overall length: 500mm.

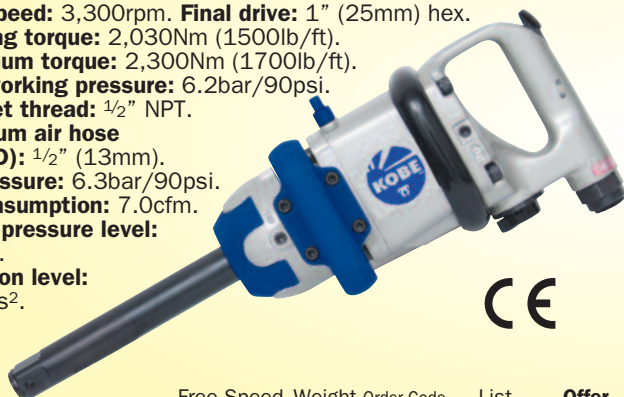

Free Speed (rpm)	Weight each	Order Code	List Price/1	Offer Price/1
3,300	9.34kg	KBE-270	£453.20	£317.24

Pistol Grip Air Impact Wrench