

KOBE 10mm Straight Drill



DS4510L

10mm Jacobs chuck, stall-resistant, safety lever throttle, high performance, planetary gearing, 3/8" - 24 spindle thread.

Air inlet thread: 1/4" NPT. **Chuck capacity:** 10mm.
Spindle thread: 3/8" - 24. **Minimum air hose size (ID):** 3/8" (10mm).
Air pressure: 90psi/6.3bar. **Air consumption:** 4cfm* (144ltr/min).
Sound pressure level: 78dBA. **Sound power level:** 96dBA.
Vibration level: 2.5m/s².
Overall length: 190mm.



*Based on a 15 second cycle per minute average use.


Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
4,500	0.90kg	-1450N	£89.40	£62.58

10mm Reversible Angle Drill

DAR1510

10mm Jacobs chuck, fingertip control of reverse, reverse exhaust, overall head height 94mm, 3/8" - 24 spindle thread.

Air inlet thread: 1/4" NPT. **Chuck capacity:** 10mm.
Minimum hose size: 3/8" (10mm).
Air pressure: 90psi/6.3bar.
Air consumption: 4cfm*

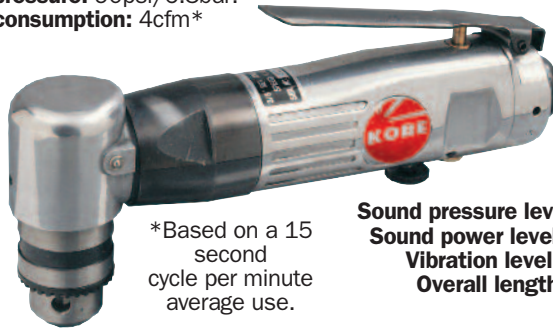

*Based on a 15 second cycle per minute average use.

Sound pressure level: 94dBA.
Sound power level: 106dBA.
Vibration level: 2.6m/s².
Overall length: 178mm.

Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
1,500	1.80kg	-1425M	£139.05	£97.34

10mm Pistol Drill

DP2210

10mm Jacobs chuck, stall resistant, heavy duty bearings, 1/2hp motor, 3/8" - 24 spindle thread.

Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 3/8" (10mm).
Chuck capacity: 10mm.
Spindle thread: 3/8" - 24.



BEST SELLER



Air pressure: 90psi/6.3bar.
Air consumption: 4cfm* (144ltr/min).
Sound pressure level: 87dBA.
Sound power level: 103dBA.
Vibration level: 1.5m/s².
Overall length: 165mm.

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
2,200	1.10kg	-1375C	£71.03	£49.72

10mm Heavy Duty Pistol Drill


DP2610

10mm Jacobs chuck, stall resistant, directional front exhaust, hammer finish casing, needle bearing gears, 3/8" - 24 spindle thread.

Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 3/8" (10mm).
Chuck capacity: 10mm.
Spindle thread: 3/8" - 24.



HEAVY DUTY

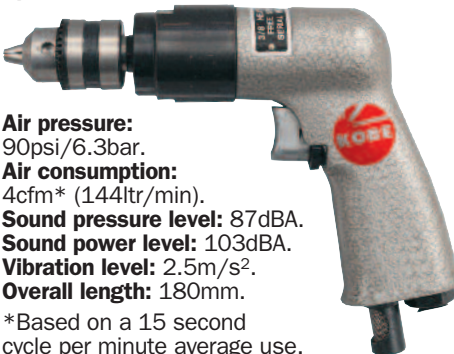

Air pressure: 90psi/6.3bar.
Air consumption: 4cfm* (144ltr/min).
Sound pressure level: 87dBA.
Sound power level: 103dBA.
Vibration level: 2.5m/s².
Overall length: 180mm.

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
2,600	0.90kg	-1390D	£114.33	£80.03

10mm Reversible Pistol Drill

DPR1810

10mm Jacobs chuck, stall resistant, heavy duty bearings, thumb switch for reverse, suitable for screwdriving.

Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 3/8" (10mm).
Spindle: 3/8" - 24.
Chuck capacity: 10mm.
Spindle thread: 3/8" - 24.



BEST SELLER



Air pressure: 90psi/6.3bar.
Air consumption: 4cfm* (144ltr/min).
Sound pressure level: 85dBA.
Sound power level: 101dBA.
Vibration level: 5.4m/s².
Overall length: 165mm.

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
1,800	1.40kg	-1400L	£95.48	£66.84

KOBE 10mm Reversible Pistol Drill

FPD3175

Suitable for drilling and screwdriving. Rubber handle provides grip and operator comfort. 3/8" keyless chuck. Stall resistant. Short gear case design. Heavy duty gearing system with oil-less bushing. Spring loaded rotor vanes. Rear exhaust. Ball bearing construction for a long tool life.

Chuck capacity: 10mm.
Spindle thread: 3/8" - 24.

Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 3/8" (10mm).
Air pressure: 90psi/6.2bar.
Air consumption: 3.35cfm*.
Sound pressure level: 95dBA.
Sound power level: 100dBA.
Vibration level: 0.7m/s².
Overall length: 188mm.

*Based on a 15 second cycle per minute average use.



OPERATOR FRIENDLY
Operator Friendly Composite Handle Grip



HEAVY DUTY

Free Speed (rpm)	Chuck size	Order Code KBE-270	List Price/1	Offer Price/1
1,800	3/8" (10mm)	-2152K	£149.35	£104.55

KOBE 10mm Reversible Pistol Grip Drill

B2834

Use for drilling and screwdriving. Two speed trigger (slow speed when pushed halfway). Directional lever accessible from both sides for left/right handed use. 10mm (3/8") chuck included. Planetary gears for longer life and smoother running. Ergonomic comfortable grip.

Chuck size: 3/8" (10mm). **Free speed:** 1,800rpm.

Recommended air pressure: 6.2bar (90psi).
Air consumption: 4cfm* (113ltr/min).
Air inlet thread: 1/4" NPT.

Spindle thread: 3/8" - 24.
Minimum air hose size (ID): 3/8" (10mm).
Noise level†: 85dBA.
Sound power level†: 96dBA.
Vibration level ‡: 0.4m/s².
Overall length: 185mm.

†Per EN ISO 15744:2002.
‡Per EN 28927-5.



Free Speed (rpm)	Weight each	Order Code KBE-270	List Price/1	Offer Price/1
1,800	1.10kg	-4310K	£218.36	£152.85

*Based on a 15 second cycle per minute average use.